

**Main specifications**

- ▼ **Size**  
3" , 4"
- ▼ **Installation type**  
DT - Back mount  
DI - Bottom mount  
DA - Adjustable angle
- ▼ **Window**  
PC, with O-ring sealed
- ▼ **Process connection**  
Material: SS304  
Thread size: 1/4" , 1/2"  
Thread type: BSPT, NPT, PF
- ▼ **Stem**  
Material: SS316  
Outer dia.: 7.4mm  
Length: 4" (standard)
- ▼ **Temperature range**  
Min.: -50°C  
Max.: +150°C
- ▼ **Applicable fluid**  
Liquid and gas that compatible with SS304
- ▼ **Ambient temperature**  
-20°C~+60°C

**Other specifications**

- ▼ **Ring**  
Stainless steel  
Outside bayonet
- ▼ **Case**  
SS304
- ▼ **Display**  
3-digit LCD display  
Resolution: 0.1
- ▼ **Refresh rate**  
10 secs/times
- ▼ **Power supply**  
1.5V mercury battery x2
- ▼ **Measuring elements**  
NTC thermistor
- ▼ **Accuracy**  
±1°C (-20 to 80°C)  
±2°C (-50 to -20°C, 80°C to 150°C)

**Digital Thermometer**

**Model: DTG-D series**

**Introduction**

DTG-D digital thermometer with high accuracy 3-digit LCD can precisely display temperature without any visual error.




Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales. (If there is any change on specification, please take the latest version as standard.)



**Features**

- OEM service
- Accuracy ±1°C in -20 to 80°C
- LCD display ensures no visual error



**Dimension**

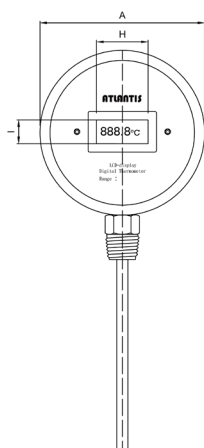


**DI Bottom mount**

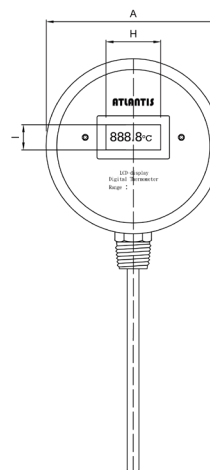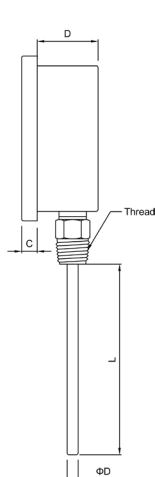

**DA Adjustable angle mount**

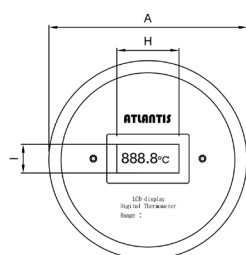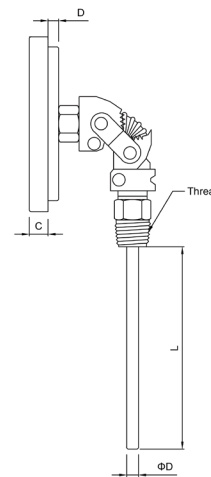

**DT Back mount**

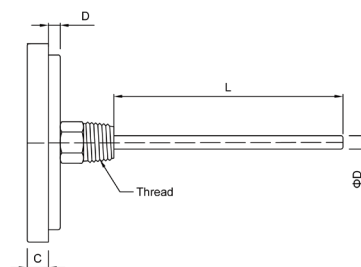

## How to order

DTG		Digital thermometer					
Code		Installation type					
DT		DT Back mount					
DI		DI Bottom mount					
DA		DA Adjustable angle mount					
Code		Size					
3		3"					
4		4"					
Code		Thread size					
X		None					
2		1/4"					
3		3/8"					
4		1/2"					
Code		Thread spec.					
X		None					
P		BSPT					
N		NPT					
F		PF					
Code		Stem length					
2.5		2.5"					
4		4"					
6		6"					
9		9"					
Code		Temperature range					
Custom		-50...150°C					
Code		Other requests					
/A		Inspection report					
/B		Third party notarized document					
/C		Tag					
/D		Stem outer diameter: 9mm/12mm/15mm					
/F		Case material - SS316					
/G		Swivel nut					
/H		Epoxy Coating					
/I		Thermowell					
/J		Refresh rate 5 secs/times					
/K		Window sealing: Silicone rubber					
DTG	DT	4	4	N	2.5	-50...125°C	Example: DTG-DT-4-4-N-2.5-(-50...125°C)