

Main Specifications

- ▼Type
Type A / Type B / Type
- ▼Process connection
Thread size:
1/4" , 3/8"
Thread type:
PT, PF
- ▼Sealing material
Neoprene / Viton
- ▼Height
50 / 100 / 150 / 200 / 300 /
400mm
- ▼Applicable fluid
Clean, low viscous liquid
- ▼Media temperature
+100°C
- ▼Max operating pressure
4kg/cm²


Other Specifications

- ▼Tube
Glass
- ▼Body
Type A: SS304
Type B: SS316
Type C: Copper alloy
- ▼Pipe shield
Type A: SS304
Type B: SS304
Type C: Copper alloy
- ▼Cap
Type A: SS304
Type B: SS304
Type C: Copper alloy
- ▼Measuring principle
Liquid expansion

Tubular Level Gauge
Model: TLG Series



Dimension

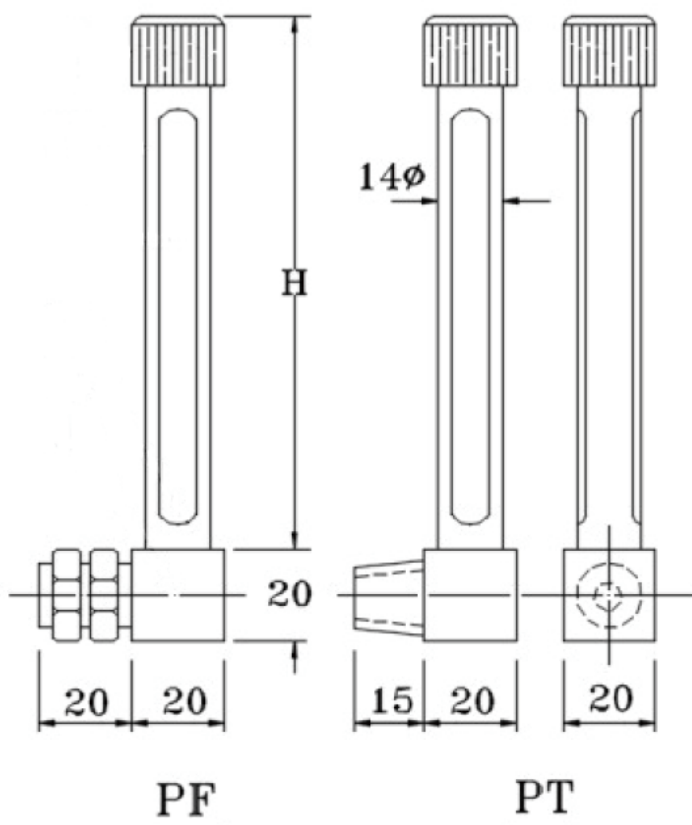

Unit: mm

Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales. (If there is any change on specification, please take the latest version as standard.)

Features

- Various material available:
Stainless steel / Copper type
- Selectable height
- Max media temperature 100°C

How to order

TLG Series Tubular Level Gauge									
Std.	Spec.	Code	Item	Code	Item	Code	Item	Code	Item
B	Type	A	Type A	B	Type B	C	Type C	–	–
3	Thread size	2	1/4"	3	3/8"	–	–	–	–
P	Thread type	P	PT	F	PF	–	–	–	–
N	Sealing material	N	Neoprene	V	Viton	–	–	–	–
200	Height	50	50	100	100	150	150	200	200
		300	300	400	400	–	–	–	–
/B	Other requests	/A	Third party notarized document						
		/B	Inspection report (issued by Re-Atlantis)						
		/C	Tag						

Order example: TLG - B - 3 - P - N - 200 - /B